

PERFORMANCE DATA

PAVER (STAGE V)

BF 600 P-3




Greatest durability



Shorter set-up times



Exemplary efficiency

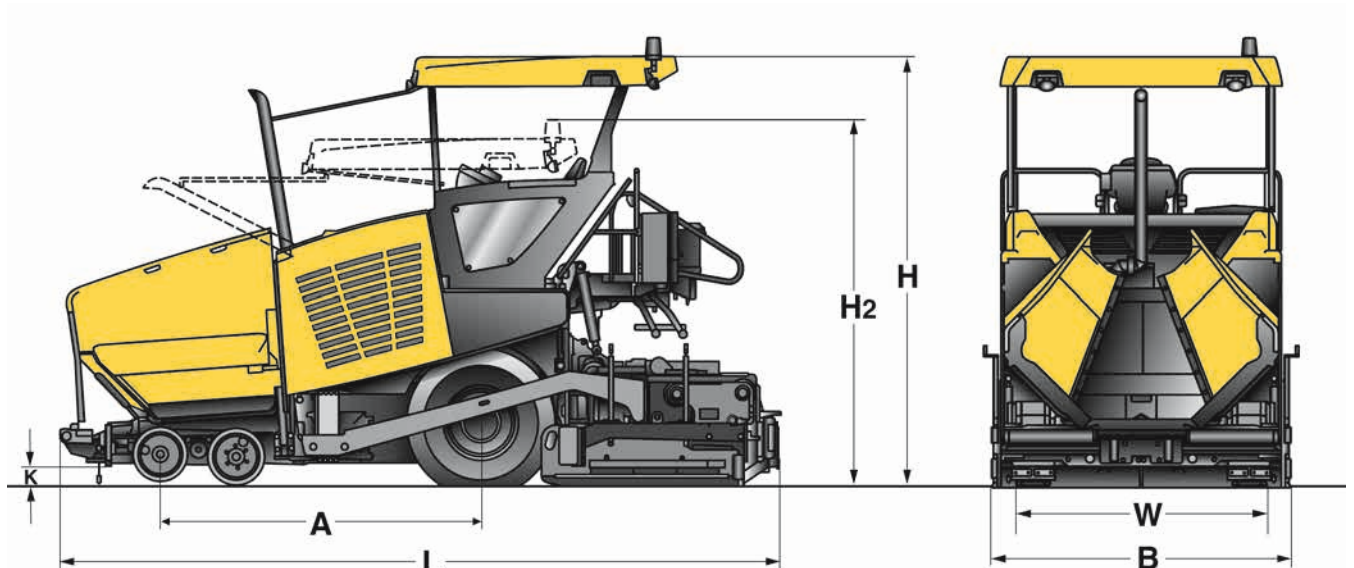

Dimensions in mm


	A	B	H	H ₂	L	W
BF 600 P-3 S 500	2580	2550	3950	3100	6360	2546
BF 600 P-3 S 600	2580	3000	3950	3100	6360	2546



Save up to 17 % fuel – demand-driven hydraulics – with BOMAG ECOMODE.



Full control from the side. The integrated levelling controller and automatic inclination ensure perfect quality.

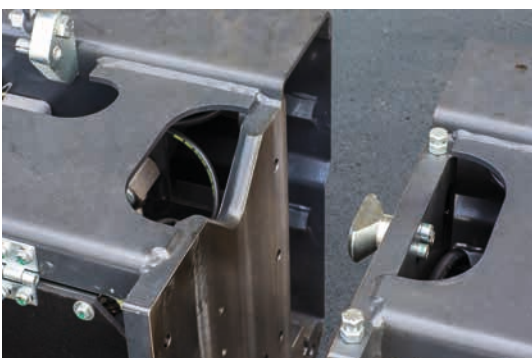

Attaching is up to 48 % quicker – thanks to the BOMAG QUICK COUPLING SYSTEM.



The right position in each situation – the comfortable driver's cabin.

Technical Data

BOMAG BF 600 P-3

Weight CECE

With S 500 screed / S 600 screed	kg	19300 / 19800
--	----	---------------

Dimensions

Transport length	mm	6360
Transport width	mm	2550 / 3000
Transport height	mm	3100

Travel characteristics

Travel speed	km/h	0-15
Working speed	m/min ⁻¹	0-45 variable

Drive

Engine manufacturer		DEUTZ
Type		TCD 6.1 L06
Emission stage		Stage V / Tier 4f
Cooling		liquid
Number of cylinders /Displacement.....		6
Rated power.....	kW	129
Auger diameter.....	min ⁻¹	2000

Undercarriage

Rear tyres / Number.....		2
Type		445/80R 25
Front tyres / Number.....		4
Diameter	mm	500
Width	mm	280

Hopper

Capacity	m ³	7,0
Width (wings open).....	mm	3330
Width (wings closed)	mm	2270
Length	mm	1800
Filling height (middle)	mm	515

Conveyor

Number.....		2
Rotary speed.....	U/min	64
Individual control		series
Reversing operation		yes

Auger

Number.....	mm	2
Auger diameter.....	mm	350
Rotary speed.....	U/min	117
Reversing operation		Serie

Screed

		S 500 / S 600
Basic width retracted	mm	2500 / 3000
Basic width extended.....	mm	5000 / 6000
Min. width with reduction skids	mm	1800 / 2300
Mat thickness	mm	300
Screed plate depth.....	mm	400
Screed plate thickness.....	mm	15
Heating		Electric
Crown	%	-2,5 ... +4,5
Tmaper frequency	Hz	0-29
Vibration frequency	Hz	20-58
Basic weight.....	kg	4400 / 4900
Max. working width.....	mm	7500

Filling capacities

Fuel.....	l	285
Hydraulic oil.....	l	160

Standard Equipment

Operator compartment

- ☒ SIDEVIEW
- ☒ Driver's seat: with swivel and side-shift
- ☒ Dashboard protection
- ☒ Hydraulic hinged roof
- ☒ A-PAVE operating concept
- ☒ Intuitive operation through display
- ☒ Electronic machine management

Tractor

- ☒ ECOMODE
- ☒ Separate control of hopper wings
- ☒ Cleaning kit
- ☒ Hydraulic, height adjustable auger
- ☒ 2 proportionally controlled and reversible wear-resistant cast augers; screw blades separately replaceable
- ☒ 2 independent and reversible scraper belts; high-wear resistant plates
- ☒ 4 x 6 wheel drive

Screed

- ☒ L.C.S. Screed relief and traction increase system
- ☒ Screed temperature control
- ☒ MAGMALIFE Aluminium heating plates
- ☒ MAGMALIFE Automatic screed heating
- ☒ Mechanical screed lock
- ☒ Crown adjustment
- ☒ Side control of auger/scraper belts
- ☒ Electronic side-mounted driver's stand with display
 - Crown profile and automatic inclination
 - Integrated levelling controller
 - Material calculator

Other

- ☒ Tools
- ☒ 8 work lights
- ☒ Three phase generator
- ☒ Socket 2 x 230 Volt

Optional Equipment

Operator compartment

- ☐ Hydraulic/electric movable SIDEVIEW platform
- ☐ Side windscreened platform
- ☐ Seat warmer
- ☐ Asphalt steam extraction

Tractor

- ☐ Central lubrication system
- ☐ Optional paint finish
- ☐ Biologically degradable hydraulic oil
- ☐ Hydraulic hopper front flap
- ☐ Hydraulic suspended and dampened push rollers
- ☐ Street legal
- ☐ 6 x 6 all wheel drive

Screed

- ☐ Hydraulic crown adjustment
- ☐ Hinged side plates
- ☐ Heated side plates
- ☐ S 500 + S 600 extensions:
 - 250 mm
 - 500 mm
 - 750 mm
 - 1250 mm
- ☐ Reduction shoes
- ☐ Edge shaper 45°/60°

Levelling systems

- ☐ Height and cross-slope sensing by means of ultrasonic or mechanical sensors

Other

- ☐ Fleet management BOMAG TELEMATIC
- ☐ Moon-light balloon
- ☐ Joblink data interface

