

PERFORMANCE DATA

PAVER (STAGE V)

BF 800 C-3




Greatest durability



Shorter set-up times



Exemplary efficiency

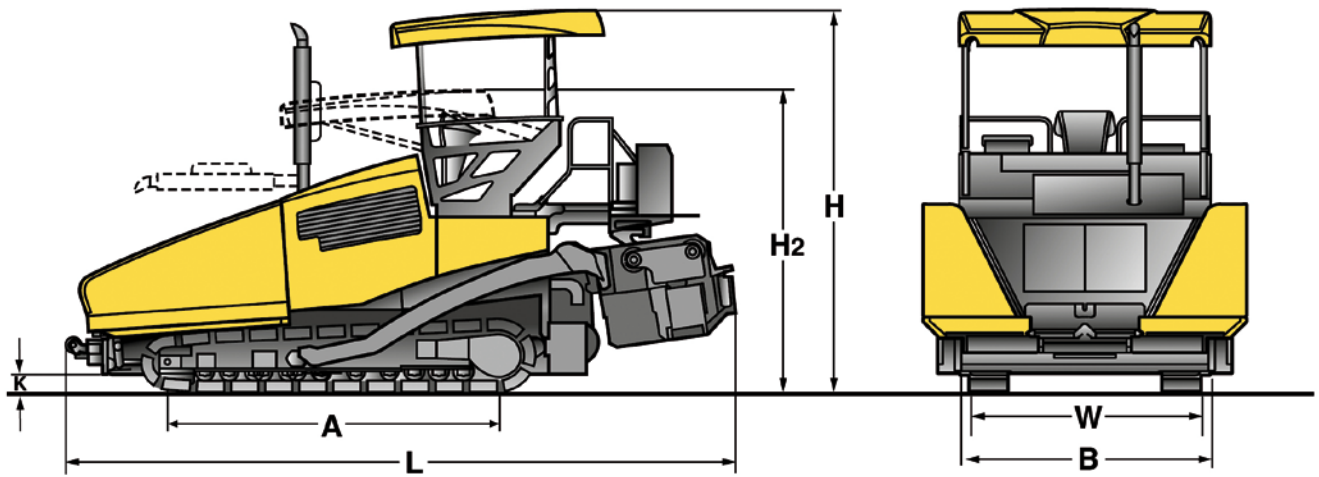

Dimensions in mm

	A	B	H	H ₂	L	W
BF 800 C-3 S500	3360	2550	3865	3055	6800	2226
BF 800 C-3 S600	3360	3000	3865	3055	6800	2226



Save up to 17 % fuel – demand-driven hydraulics – with BOMAG ECOMODE.



Full control from the side. The integrated levelling controller and automatic inclination ensure perfect quality.



The new control centre. The intuitive operator interface not only provides all the necessary information, but also supports the operator with assistance functions.



The right position in any situation – the comfortable driver's cab with swivel seat concept.

Technical Data

BOMAG BF 800 C-3

Weight CECE

With S 500 screed / with S 600 screed	kg	23000 / 23500
---	----	---------------

Dimensions

Transport length	mm	6800
Transport width	mm	2550 / 3000
Transport height	mm	3020

Travel characteristics

Travel speed (1)	km/h	0-4
Working speed (1)	m/min	0-25

Drive

Engine manufacturer		DEUTZ
Type		TCD 6.1 L06
Exhaust classification		Stage V / TIER 4f
Cooling		liquid
Number of cylinders		6
Rated power ISO 3046	kW	140
Speed	min ⁻¹	2000

Crawler assembly

Crawler track		
-Axle base	mm	3360
-Width	mm	300

Hopper

Capacity	m ³	7,2
Width (wings open)	mm	3390
Width (wings closed)	mm	2463
Length	mm	2186
Filling height (middle)	mm	560

Scraper belt

Number		2
Width	mm	400
Speed	min ⁻¹	64
Individual control		Serie
Reversing operation		Serie

Conveyor auger

->Number		2
->Auger diameter	mm	400
->Rotary speed	min ⁻¹	104
->Reversing operation		Serie

Screed

Screed type		S 500 / S 600
Basic width retracted	mm	2550 / 3000
Basic width extended	mm	5000 / 6000
Max. working width	mm	9000 / 10000
min. width with reduction skids	mm	1650 / 2100
Mat thickness	mm	300
Smoothing plate depth	mm	400
Smoothing plate thickness	mm	15
Heating		Electric
Crown	%	-2,5 ... +4,5
Tamper frequency	Hz	0-29
Vibration frequency	Hz	20-58
Basic weight	kg	4400 / 4900

Filling capacities

Fuel	l	315
Hydraulic oil	l	160

Standard Equipment

Operator compartment

- ☒ SIDEVIEW
- ☒ Driver's seat: with swivel and side-shift
- ☒ Dashboard protection
- ☒ Hydraulic hinged roof
- ☒ A-PAVE operating concept
- ☒ Intuitive operation through display
- ☒ Electronic machine management

Tractor

- ☒ ECOMODE
- ☒ Separate control of hopper wings
- ☒ Cleaning kit
- ☒ Hydraulic, height adjustable auger
- ☒ Track scraper
- ☒ 2 proportionally controlled and reversible wear-resistant cast augers, screw blades separately replaceable
- ☒ 2 independent and reversible scraper belts, high-wear resistant plates
- ☒ Rubber track pads

Screed

- ☒ L.C.S. Screed relief and traction increase system
- ☒ Screed temperature control
- ☒ MAGMALIFE Aluminium heating plates
- ☒ MAGMALIFE Automatic screed heating
- ☒ Hydraulic screed lock
- ☒ Crown adjustment
- ☒ Side control of auger/scraper belts
- ☒ Electronic side-mounted driver's stand with display
 - Crown profile and automatic inclination
 - Integrated levelling controller
 - Material calculator

Other

- ☒ Tools
- ☒ 8 work lights
- ☒ 30 kVA generator
- ☒ Socket 2 x 230 volt

Optional Equipment

Operator compartment

- ☐ Hydraulic/electric movable SIDEVIEW platform
- ☐ Windscreened platform
- ☐ Lateral Weather protection
- ☐ Comfort seat
- ☐ Seat heating
- ☐ Asphalt steam extraction
- ☐ Advanced operating concept

Tractor

- ☐ LED roof working lights
- ☐ Central lubrication system
- ☐ Optional paint finish
- ☐ Biologically degradable hydraulic oil
- ☐ Hydraulic hopper front flap
- ☐ Dampened push rollers

Screed

- ☐ Hydraulic sideplates
- ☐ Hydraulic crown adjustment
- ☐ Hinged side plates
- ☐ Heated side plates
 - S 500 + S 600 extensions: 250 mm, 500 mm, 750 mm, 1250 mm
- ☐ Dosing plates
- ☐ Reduction shoes
- ☐ Edge shaper 45°/60°

Levelling systems

- ☐ Height and cross-slope sensing by means of ultrasonic or mechanical sensors

Other

- ☐ Fleet management BOMAG TELEMATIC
- ☐ Ballon light
- ☐ Joblink data interface

