

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 40/60 D



Maximum longevity

Full protection hood - engine and components protected all around



Precise and save to operate

BOMAG Comfortable control lever




Safe transport

Transport wheels (optional)

Shipping dimensions in m3

BPR 40/60 D

0,590

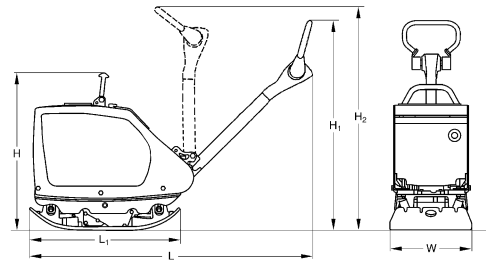

Standard Equipment

- Fully closed engine protection hood made of high-strength steel
- Comfortable control lever
- Height adjustable steering rod
- Low vibration steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Fully protected V-belt
- Automatic decompression
- Recoil starter
- 3-2-1 Warranty
- Hour meter (Electric starter)

Optional Equipment

- Transport wheels (+5kg)
- Electric starter (+20kg)
- Tool kit
- Special painting
- Plastic mat
- Service Kit
- TOUGH WARRANTY

Dimensions in mm

	H	H1	H2	L	L1	W
BPR 40/60 D	700	1030	1150	1405	762	600

Technical Data

**BOMAG
BPR 40/60 D**

Weights

Operating weight CECE (W)	kg	260
Basic weight	kg	257

Dimensions

Basic working width	mm	600
Lowest passing height	mm	700
Min. height w. steering in top position	mm	1.030
Max. height w. steering in top position	mm	1.120

Driving Characteristics

Working speed, max.	m/min	27
Max. gradeability (dep. on soil con.)	%	32

Drive

Engine manufacturer	Hatz	
Type	1B20	
Emission stage	Stage V	
Cooling	air	
Number of cylinders	1	
Performance ISO 3046	kW	3,1
Speed	min-1	3.000
Drive system	mech.	
Fuel	Diesel	
Fuel consump. aver. during operation	l/h	0,7

Exciter system

Frequency	Hz	80
Centrifugal force	kN	40
Amplitude	mm	1,40

Capacities

Fuel	l	3,0
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 692 93 010

040219 Sa02

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

